


SIT VARIO - for variable pulleys

MOULDED COG

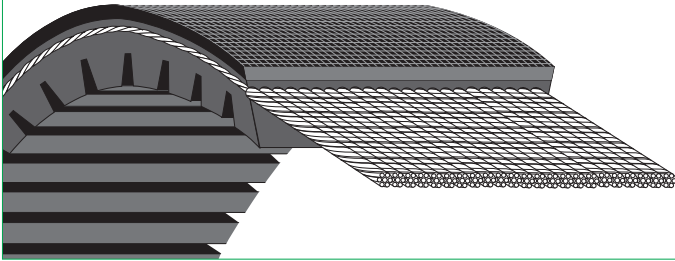

KEY FEATURES & BENEFITS

- Oil, ozone and abrasion resistance
- Temperature: -30/+75 °C
- High-power capacity
- Superior stability

These belts are used for high power transmission on variable speed drive systems.

Belt dimension


Section a x b [mm]	13x6*	22x8*	28x8 28x10*	36x10 36x12*	46x12 46x13* 46x14	50x14 54x16*	70x20
-----------------------	-------	-------	----------------	-----------------	--------------------------	-----------------	-------

*= Recommended measures



BELT MATERIAL

- Tensile member: Flexten
- Compound: Chloroprene

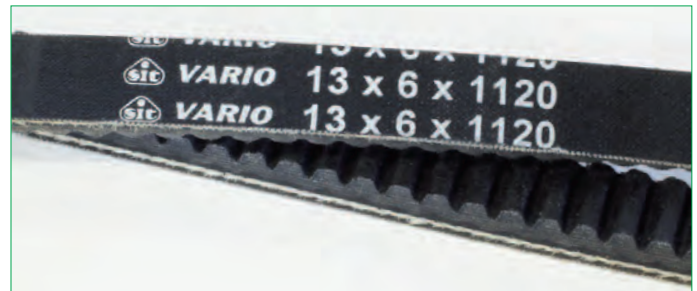

Available sizes

Belt section	13x6	22x8 28x8	28x10 36x10	36x12 46x12	46x14 54x14	54x16	70x20
Inside length [mm]	Pitch length [mm]						
400	-	-	-	-	-	-	-
425	455	-	-	-	-	-	-
450	480	-	-	-	-	-	-
475	505	-	-	-	-	-	-
500	530	540	-	-	-	-	-
525	555	560	-	-	-	-	-
550	580	590	-	-	-	-	-
560	590	600	-	-	-	-	-
575	605	610	-	-	-	-	-
600	630	640	650	655	-	-	-
625	655	660	670	680	-	-	-
630	660	670	680	-	-	-	-
650	680	690	700	705	-	-	-
670	700	710	720	-	-	-	-
675	705	715	730	-	-	-	-
700	730	740	750	755	-	-	-
710	740	750	760	765	-	-	-
725	755	760	770	780	-	-	-
750	780	790	800	805	-	-	-
770	800	810	820	825	-	-	-
775	805	815	830	830	-	-	-
790	820	820	840	845	-	-	-
800	830	840	850	855	860	-	-
820	850	860	870	875	880	-	-
850	880	890	900	905	910	-	-
900	930	940	950	955	960	-	-
950	980	990	1000	1005	1010	1025	-
960	990	1000	1010	1015	1020	1035	-
1000	1030	1040	1050	1055	1060	1075	-
1050	1080	1090	1100	1105	1110	1125	-
1060	1090	1100	1110	1115	1120	1135	-
1100	1130	1140	1150	1155	1160	1175	-
1120	1150	1160	1170	1175	1180	1195	-
1150	1180	1190	1200	1205	1210	1225	-
1180	1210	1220	1230	1235	1240	1255	-
1200	1230	1240	1250	1255	1260	1275	-
1225	1255	1260	1270	1280	1285	1300	-
1250	1280	1290	1300	1305	1310	1325	1345
1320	1350	1360	1370	1375	1380	1395	1415
1350	1380	1390	1400	1405	1410	1425	1445
1400	1430	1440	1450	1455	1460	1475	1495
1500	-	1540	1550	1555	1560	1575	1595
1600	-	1640	1650	1655	1660	1675	1695
1700	-	1740	1750	1755	1760	1775	1795
1800	-	1840	1850	1855	1860	1875	1895
1900	-	1940	1950	1955	1960	1975	1995
2000	-	2040	2050	2055	2060	2075	2095
2120	-	2160	2170	2175	2180	2195	2215
2240	-	2280	2290	2295	2300	2315	2335
2360	-	-	2410	2415	2420	2435	2455
2500	-	-	2550	2555	2560	2575	2595
2800	-	-	-	-	-	-	2895
3150	-	-	-	-	-	-	3245
3210	-	-	-	-	-	-	3305
3520	-	-	-	-	-	-	3615

Belt section	46x13
Inside length [mm]	Pitch length [mm]
795	855
845	905
870	930
895	955
945	1005
995	1055
1025	1085
1055	1115
1115	1175
1140	1200
1155	1215
1175	1235
1190	1250
1245	1305
1265	1325
1315	1375
1395	1455
1430	1490
1490	1550
1560	1620
1595	1655
1635	1695
1695	1755
1735	1795
1795	1855
1895	1955
1915	1975
2000	2060
2060	2120
2120	2180
2210	2270
2240	2300
2360	2420
2400	2460
2500	2560
2800	2860

Part Number	CV 1200 V2810
SIT Vario	
Inside length / pitch length mm	
Section (width - height)	